


# メタルタイSTB・MBTタイプ 専用結束工具 KST-STG200

Artical-No.:110-09950

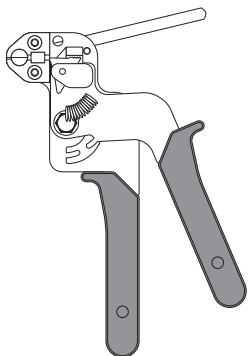

適合メタルタイ

- タイ幅：最大12.3mm
- タイ厚：最大0.38mm


重量：561g

**HellermannTyton**


**ヘラマンタイトン株式会社**

[www.hellermanntyton.co.jp](http://www.hellermanntyton.co.jp)

KST-STG200は、メタルタイの締め付けと切断を行う結束工具です。トリガーを繰り返し引くことで、締め付け力を調整し、最後にタイカット用レバーを押し上げて、余分なタイを切断します。取り扱いが簡単で、手で締め付けるよりも確実な結束が行えます。

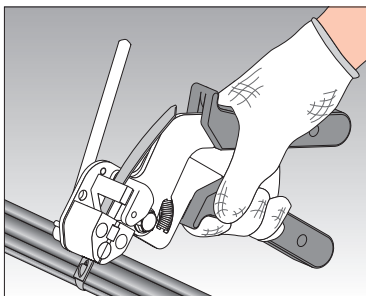

① 被結束物にメタルタイを手で仮締めします。次に、メタルタイの先端をKST-STG200のタイ挿入口の溝(凹み)に横から差し込みます。

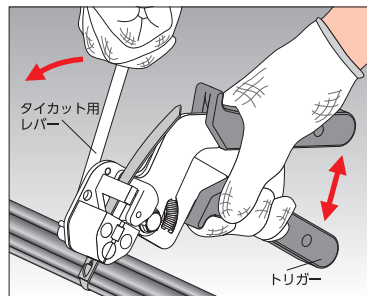

② トリガーを繰り返し引くことで、メタルタイが締め付けられます。タイカット用レバーを上押しすると、余分なタイが切断されます。

## ⓘ ご注意


- ・工具及びメタルタイの取扱いには、十分ご注意ください。
- ・修理対象外製品です。

- |  |   |
|--|---|
| <p>■東京オフィス<br/>〒151-0073 東京都渋谷区笹塚1-48-3 住友不動産笹塚太陽ビル6F<br/>●関東販売課 / TEL:03-5790-3113 FAX:03-6675-3255<br/>●オートモーティブ事業部 / TEL:03-5790-3125 FAX:03-6683-7883</p> <p>■仙台オフィス<br/>〒980-0811 宮城県仙台市青葉区一番町1-9-1 仙台トラストタワー18F<br/>●東北販売課 / TEL:022-722-1057 FAX:022-722-1058</p> <p>■名古屋オフィス<br/>〒460-0008 名古屋市中区栄2-3-1 名古屋広小路ビルディング4F<br/>●中部販売課 / TEL:052-229-1052 FAX:052-687-1453<br/>●オートモーティブ事業部 / TEL:052-229-1053 FAX:052-687-3115</p> | <p>■大阪オフィス<br/>〒532-0003 大阪市淀川区宮原3-3-31 上村ニッセイビル12F<br/>●関西販売課 / TEL:06-6395-8610 FAX:06-6485-4897<br/>●オートモーティブ事業部 / TEL:06-6395-8427 FAX:06-6485-4897</p> <p>■福岡オフィス<br/>〒812-0013 福岡市博多区博多駅東2-6-1 九勸筑紫通ビル3F<br/>●九州販売課 / TEL:092-481-8780 FAX:092-481-8778</p> |
|--|---|


OM-KST-STG200-V12-2102-1K-HT/PI

⚠ Caution: Be careful with your hands when using the tool and stainless steel cable ties.

② Pull the handle to tighten the stainless steel cable tie, keep the tool under tension while you cut off the excess tail flush with the head by using the cutting lever.

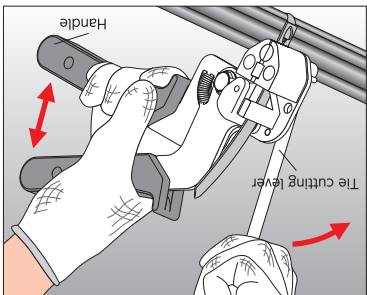


① First, tighten the stainless steel cable tie onto the wire by hand and then insert the tie into the KST-STG200.

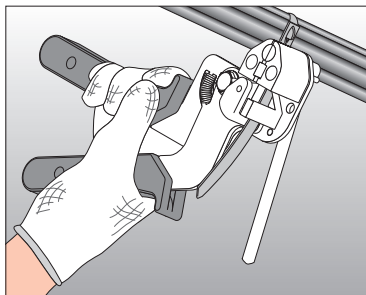

The KST-STG200 is a tool for tensioning and cutting stainless steel cable tie. The tensioning strength can be adjusted by pulling the handle. When tension strength is reached, cut off the excess tail flush with the head by using the tie cutting lever. The tool is easy to handle and is a far more reliable way of tensioning cable ties than by hand.

**HellermannTyton**  
[www.hellermanntyton.com](http://www.hellermanntyton.com)

Max. strap width: 12.3 mm  
Weight : 561g

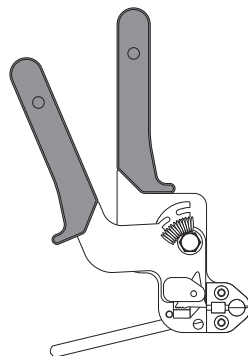

Artical-No.:110-09950

**KST-STG200**  
Manual tensioning tool  
for Metal Ties STB・MBT type